

IN THE CLAIMS

Please cancel claims 1-7 and add new claims 8-24.

8. A piezoelectric actuator, comprising

- a piezoelectric element (2) for subjecting an actuating element (9) to a tensile force or compressive force, and a compensating element (3; 20), the piezoelectric element (2) and the compensating element (3; 20) having essentially the same coefficients of temperature expansion, wherein, the piezoelectric element (2) in its effective direction resting with one end against a fixation edge of a housing (6) via a spring (4) and with its other end on another fixation edge of the housing (6) via a pressure plate (8) and a prestressing spring (7), and

- a spring plate (5), which is disposed between the piezoelectric element (2) and the spring (4) and on which the compensating element (3; 20) is additionally disposed, which with its other end abuts the housing (6) firmly and is located essentially parallel to the piezoelectric element (2),

- the piezoelectric element (2) and the compensating element (3; 20) being hollow cylinders, which are disposed about the axis of the actuating element (9).

9. The piezoelectric actuator of claim 8, wherein the piezoelectric element (2) comprises a multilayered structure of transversely disposed ceramic piezoelectric layers, which lengthen in the effective direction when an external electrical voltage is applied, and the compensating element (3) is constructed of ceramic.

10. The piezoelectric actuator of claim 8, wherein the piezoelectric element (2) comprises a multilayered structure of transversely disposed ceramic piezoelectric layers, which lengthen in the effective direction when an external electrical voltage is applied; and that the compensating element (20) comprises longitudinally disposed piezoelectric layers, which shorten in the effective direction when an external electrical voltage is applied.

11. The piezoelectric actuator of claim 8, wherein the piezoelectric element (2) and the compensating element (3; 20) are constructed in bar form, with a substantially round or rectangular cross section.

12. The piezoelectric actuator of claim 9, wherein the piezoelectric element (2) and the compensating element (3; 20) are constructed in bar form, with a substantially round or rectangular cross section.

13. The piezoelectric actuator of claim 10, wherein the piezoelectric element (2) and the compensating element (3; 20) are constructed in bar form, with a substantially round or rectangular cross section.

14. The piezoelectric actuator of claim 8, wherein the end of piezoelectric element (2), by which it rests on the pressure plate (8), is disposed on the far side of the piezoelectric actuator (1) in terms of the effective direction, so that the useful force (F_u) of the piezoelectric actuator (1) is a tensile force.

15. The piezoelectric actuator of claim 9, wherein the end of piezoelectric element (2), by which it rests on the pressure plate (8), is disposed on the far side of the piezoelectric actuator (1) in terms of the effective direction, so that the useful force (F_u) of the piezoelectric actuator (1) is a tensile force.

16. The piezoelectric actuator of claim 10, wherein the end of piezoelectric element (2), by which it rests on the pressure plate (8), is disposed on the far side of the piezoelectric actuator (1) in terms of the effective direction, so that the useful force (F_u) of the piezoelectric actuator (1) is a tensile force.

17. The piezoelectric actuator of claim 11, wherein the end of piezoelectric element (2), by which it rests on the pressure plate (8), is disposed on the far side of the piezoelectric actuator (1) in terms of the effective direction, so that the useful force (F_u) of the piezoelectric actuator (1) is a tensile force.

18. The piezoelectric actuator of claim 12, wherein the end of piezoelectric element (2), by which it rests on the pressure plate (8), is disposed on the far side of the piezoelectric actuator (1) in terms of the effective direction, so that the useful force (F_u) of the piezoelectric actuator (1) is a tensile force.

19. The piezoelectric actuator of claim 13, wherein the end of piezoelectric element (2), by which it rests on the pressure plate (8), is disposed on the far side of the piezoelectric actuator (1) in terms of the effective direction, so that the useful force (F_u) of the piezoelectric actuator (1) is a tensile force.

Ag
Cm-10

10018459.031202

20. The piezoelectric actuator of claim 8, wherein the end of piezoelectric element (2), by which it rests on the pressure plate (8), is disposed on the side of the piezoelectric actuator (1) located in the effective direction, so that the useful force (F_u) of the piezoelectric actuator (1) is a compressive force.

21. The piezoelectric actuator of claim 9, wherein the end of piezoelectric element (2), by which it rests on the pressure plate (8), is disposed on the side of the piezoelectric actuator (1) located in the effective direction, so that the useful force (F_u) of the piezoelectric actuator (1) is a compressive force.

22. The piezoelectric actuator of claim 10, wherein the end of piezoelectric element (2), by which it rests on the pressure plate (8), is disposed on the side of the piezoelectric actuator (1) located in the effective direction, so that the useful force (F_u) of the piezoelectric actuator (1) is a compressive force.

23. The piezoelectric actuator of claim 8, wherein the end of piezoelectric element (2), by which it rests on the pressure plate (8), is disposed on the side of the piezoelectric actuator (1) located in the effective direction, so that the useful force (F_u) of the piezoelectric actuator (1) is a compressive force.

24. The piezoelectric actuator of claim 8, further comprising a heat-conducting paste is disposed between the piezoelectric element (2) and the compensating element (3; 20).

IN THE ABSTRACT

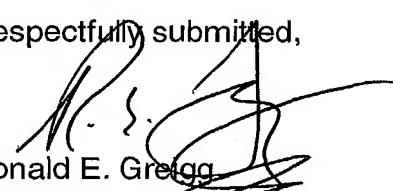
Please substitute the attached Abstract of the Disclosure for the abstract as originally as filed.

REMARKS

The above amendments are being made to place the application in better condition for examination.

Entry of the amendment is respectfully solicited.

Respectfully submitted,


Ronald E. Greigg
Registration No. 81,517
Customer No. 002119
Attorney for Applicants

Greigg & Greigg P.L.L.C.
1423 Powhatan Street, Unit One
Alexandria, VA 22314

Telephone: (703) 838-5500
Facsimile: (703) 838-5554

10018459-031202